





Leap Forward To The Next Generation Of Valve Systems


A Better Universal Valve System


Introducing GrohFlex® – a universal valve system designed to meet the needs of the North American market. It offers affordable flexibility in function and style. It's easy to install, easy to upgrade and easy to maintain. It's designed to help make a complex business easy.

Only the new GrohFlex® system covers such a wide range of installation types – from single-showers to tub/shower combos to high-flow custom showers – with just one universal roughin. Plus, GrohFlex® offers pressure balancing and thermostatic control options for both the master and secondary bath. And its smart design features easy, intuitive operation with all functions controlled from a single axis, reducing the need for separate volume controls and diverters.

GrohFlex®

The smart bathroom solution that saves

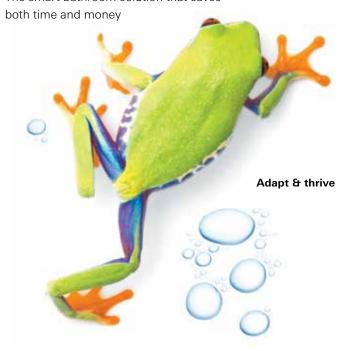

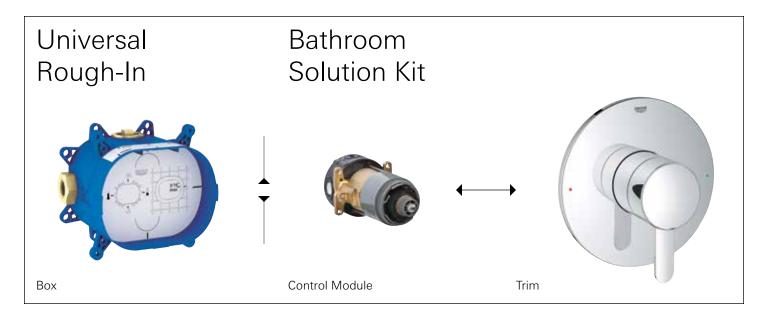

One Rough-In Does It All

Multiple functions/multiple trims — all designed to fit in one universal rough-in box. It provides the groundwork for any shower or tub/shower installation, making complex planning, ordering and installation easy and efficient. And it simplifies rough-in construction – allowing work to proceed, even without final function or trim selection. Plus, integrated service stops and an enhanced flushing system make for fast and easy installation/maintenance.

Smart Solutions, Not More Solutions

With the GrohFlex® system, we've combined the brains and beauty of your shower project into a single package. Unlike traditional valve systems, the GrohFlex® control module ships with the trim – not the rough-in box. Designed to fit the universal rough-in box, these Bathroom Solution Kits offer ultimate flexibility in function and design, while reducing specification complexity. Fewer SKUs are needed to meet all your business needs, simplifying specification and lowering inventory costs.

GROHE's fifteen Bathroom Solution Kits were developed to cover every shower installation type. Whether a high-flow custom shower for the master bath or a tub/shower combo for the secondary bathroom, we've got it covered. If your installation calls for pressure balancing or thermostatic control, we've got it covered. And each control module comes packaged with a trim that's sure to fit your customers' style.

ONE ROUGH-IN, FIVE BATHROOM SOLUTIONS

No matter the application, we've got you covered. GrohFlex® is the advanced universal rough-in valve system with simplicity and flexibility built in. One roughin works with any shower or tub/shower application - from a simple single-shower to the popular tub/shower combo to a luxurious high-flow custom shower. And it offers pressure balancing and thermostatic control solutions for both the master and secondary bath.

Single Function

Ideal for Standard Baths


Pressure balance control module

Single Function

Ideal for Standard Baths

Thermostatic* control module

• Thermostatic modules feature GROHE TurboStat® technology

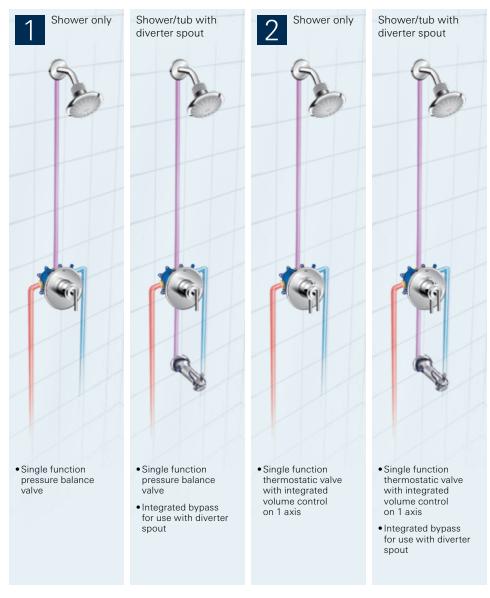

^{*} Includes control module and trim

Dual Function

Ideal for Master Baths

Available with a pressure balance or a thermostatic* control module

 Thermostatic modules feature GROHE TurboStat® technology

Dual Function

Ideal for Master Baths

Available with a pressure balance or a thermostatic* control module

 Thermostatic modules feature GROHE TurboStat® technology

2 Shower outlets/tub

Custom Shower

Ideal for Master Baths

Thermostatic* control module only

• Features GROHE TurboStat® technology



Shower/tub with nondiverter spout 2 Shower outlets



Dual function valve, pressure balance or thermostatic, both with integrated volume control and 2-way diverter function on 1 axis

 Dual function valve, pressure balance or thermostatic, both with integrated volume control and 2-way diverter function on 1 axis



- Dual function valve, pressure balance or thermostatic, both with integrated volume control and 2-way diverter function on 1 axis
- Integrated bypass for use with diverter spout
- Use twin elbow, model 03671000 for installations with three outlets



flow rate of 53 L/min (45 gpm) at 45 psi

FLEXIBILITY THAT BENEFITS YOUR BUSINESS, AND EVERYONE YOU DO BUSINESS WITH

Designers, Architects and Home Builders

- Offers maximum flexibility and design options
- Covers all installation options: from single-showers to tub/ shower combos to high-flow custom showers
- Offers pressure balancing and thermostatic control for both the master and secondary bath
- Simplifies project planning and rough-in construction, while offering a wide range of functionality
- Easy to upgrade from pressure balancing to thermostatic control at any time

Wholesalers and Distributors

- One rough-in and 15 Bathroom Solution Kits cover all installation options
- · Simplifies ordering, warehousing and distribution
- Reduces inventory handling and product returns
- Lowers costs fewer SKUs, parts and components
- Makes a complex business easy!

Plumber Installation/Servicing

- Reduces specification complexity and simplifies the installation/repair process for any size project
- Fewer decisions need to be made in the field
- Saves time, reduces costs and improves efficiency
- Integrated service stops, check valves and enhanced flushing system make for fast and easy installation/maintenance
- It's easy to install, easy to upgrade and easy to maintain
- For single function units, integrated backchannel allows for use in a tub/shower installation with diverter spout
- Thin wall mounting option designed for acrylic and fiberwall installations

General Contractors and Professional Remodelers

- Offers smart shower design solutions while saving time and money
- Simplifies the construction process allows rough-in installation to proceed, even if final function and trim choices have not been made
- Reduces installation errors
- All functionality is built into the valve no additional controls for volume or diverting are needed for single-shower or tub/ shower installations
- The easy and inexpensive way to enhance the secondary bathroom business with thermostatic control

Hospitality

- Simplifies new construction specifications
- Supports a standard tub/shower installation, as well as a custom "suite" installation
- Minimizes parts inventory
- · Quick maintenance and upgrades, reducing downtime
- Lowers costs











ADVANCED ENGINEERING, SMART SOLUTIONS

Give your customers what they want

- Designed to meet the needs of the North American market
- All functions controlled from one axis, reducing the need for separate
 volume controls and diverters (single function and dual function models)
- Offers affordable flexibility in function and style
- Offers thermostatic control for the secondary bathroom
- Easy to change trim styles
- Easy to upgrade from pressure balancing to thermostatic control

Make a complex business easy


- Offers smart design options while saving time and money
- · Simplifies project planning
- Simplifies ordering, warehousing and distribution
- · Offers a wide range of functionality
- Offers maximum flexibility and design options
- Makes it easy to always have the right rough-in in stock
- Lowers costs fewer SKUs, parts and components
- Lowers inventory handling and reduces product returns

Simplify installation

- One rough-in for all installations
- Reduces specification complexity
- ½-inch installation for all functions, including high-flow thermostat
- Streamlines construction process allows rough-in installation to proceed even if final function and trim choices have not been made
- · Reduces installation errors and associated costs
- Simplifies the repair/maintenance process

Functionality that meets your needs

- One universal rough-in does it all covers all shower installation types: from single-showers to tub/shower combos to high-flow custom showers
- Designed to fit the universal box, the Bathroom Solution Kits contain the valve and trim – offering unique system simplicity and flexibility
- Offers pressure balancing and thermostatic control for both the master and secondary bath
- All thermostatic control modules feature patented GROHE TurboStat® technology for near instantaneous, precise temperature control
- Easy to upgrade from pressure balancing to thermostatic control at any time
- All functionality is built into the valve no additional controls for volume or diverting are needed for single-shower and tub/ shower installations
- Thermostatic high-flow option delivers a flow rate of 14 GPM (at 45 psi) – designed for luxury custom showers to power shower head and/or hand shower and a range of body jets at the same time
- Integrated service stops, check valves and an enhanced flushing system make for fast and easy installation/ maintenance
- Integrated backchannel allows for use in a tub/shower installation with diverter spouts (no twin ell needed)
- Thin wall mounting capability, designed for acrylic and fiberwall installations
- Full protection against leakages in the wall from within universal rough-in box

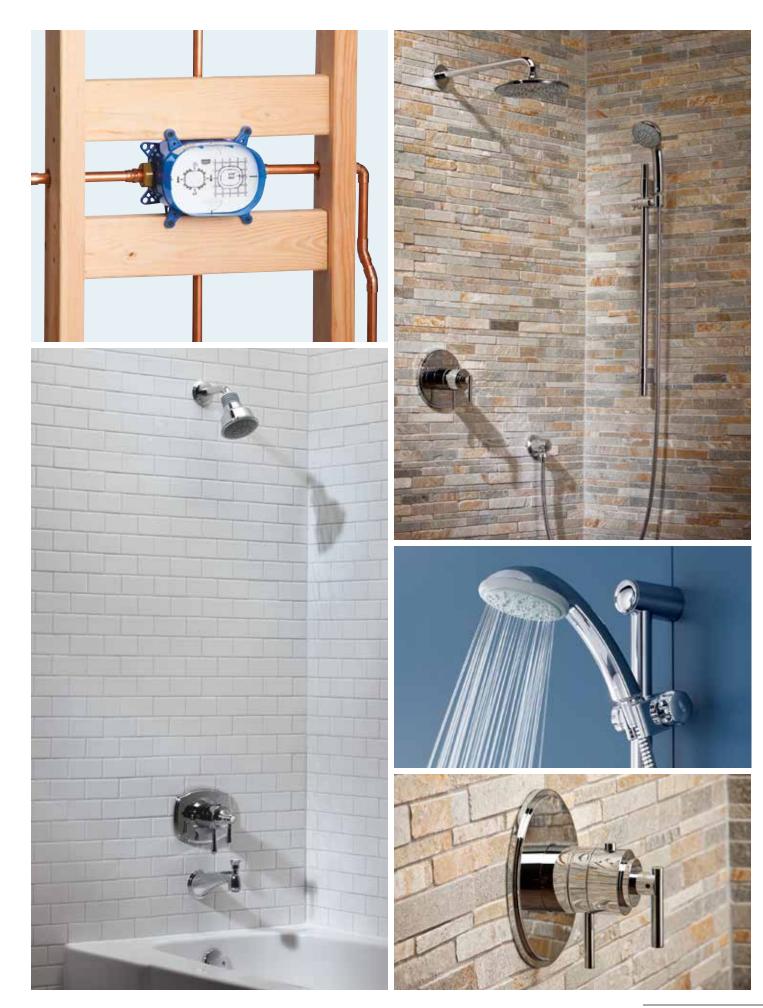

CAPTURING YOUR STYLE

It's the difference between an ordinary bathroom and a GROHE bathroom. Today's bathroom goes way beyond function. It's been transformed into an environment of relaxation and pampering, an escape from the frantic outside world. The bathroom also presents a unique opportunity to showcase one's style. To this end, GrohFlex® offers a range of stunning exterior trims that's sure to fit your customers' style.

Cosmopolitan

Refined and honest, the Cosmopolitan style is a meticulous balance of design and functionality. Influenced by modern architecture and Bauhaus aesthetics, it fuses bold geometric shapes with advanced engineering.

Timeless

Making the transition between traditional and contemporary, the Timeless style is born of the tension between old and new, ornate and clean-cut, romantic and edgy. Characterized by organic form fused with modern technology, the key to Timeless design is in the mix and match of styles that make it your own.

Authentic


Reviving the romance and elegance of past eras, the Authentic style reveals a simpler, more reflective way of life. Incorporating modern engineering and functionality, Authentic design mixes a variety of traditional styles, such as Classical, Belle Époque and Art Nouveau, to create bathroom fittings that offer comfortable, inviting experiences.

Trim Styles

Suggested Coordinating GROHE Product Families





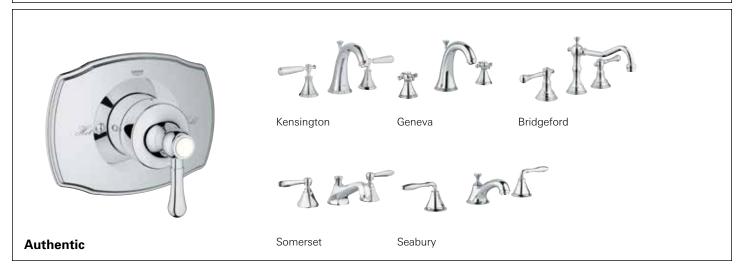

PRODUCT LINE-UP AT-A-GLANCE

Ready for anything, and everything. With GrohFlex, function and form are uniquely blended into a simple, flexible system design that covers all shower and tub/shower installation options. So, wherever your system needs take you, you'll be ready for anything. Making a complex business easy!

And any time you need to change things up, GrohFlex® makes it simple. Easy to change out trim styles. Easy to upgrade from pressure balancing to thermostatic control. And easy to maintain and repair.

One rough-in, five functions, three trim styles – fewer SKUs that do it all. The smart solution for shower and tub/shower installation has arrived.



35 026 000

Universal Rough-In Box

Single Function Pressure Balance

Shower or tub/shower with diverter spout

Ideal for Secondary Baths

Single Function Thermostatic

Shower or tub/shower with diverter spout

Ideal for Secondary Baths

Dual Function Pressure Balance

2 shower outlets or tub/shower with non-diverter spout

Ideal for Master Baths

Dual Function Thermostatic

2 shower outlets or tub/shower with non-diverter spout

Ideal for Master Baths

Custom Shower Thermostatic

High-flow custom shower; separate volume controls are required

Ideal for Master Baths

Cosmopolitan

19 880 000 StarLight® Chrome 19 880 ENO

Brushed Nickel



Timeless Authentic

19 866 000

19 866 ENO

19 848 000

19 848 ENO

Brushed Nickel

StarLight® Chrome



Control Module and Trim



Includes Control Module and Trim



19 843 ZB0 Oil Rubbed Bronze

StarLight® Chrome

19 843 BE0 Polished Nickel

19 843 000

19 843 ENO **Brushed Nickel**



Control Module and Trim


Includes

Includes Control Module and Trim

19 869 000 StarLight® Chrome 19 869 ENO **Brushed Nickel**



Control Module and Trim



StarLight® Chrome

19 867 000

19 867 ENO

Brushed Nickel



Includes Control Module and Trim



19 822 ZB0 Oil Rubbed Bronze

19 822 BE0 Polished Nickel

19 844 000

19 844 ENO

Brushed Nickel 19 844 ZB0 Oil Rubbed Bronze

StarLight® Chrome



Includes Control Module and Trim

19 881 000 StarLight® Chrome 19 881 ENO **Brushed Nickel**



Includes Control Module and Trim





Includes Control Module and Trim



19 844 BE0 Polished Nickel



Includes Control Module and Trim

19 878 000 StarLight® Chrome 19 878 ENO

Brushed Nickel



Includes Control Module and Trim





Includes Control Module and Trim





Polished Nickel



Control Module and Trim

19 879 000 StarLight® Chrome 19 879 ENO **Brushed Nickel**



Control Module and Trim

19 865 000 StarLight® Chrome 19 865 ENO **Brushed Nickel**




Includes Control Module and Trim


19 839 000 StarLight® Chrome 19 839 ENO


Brushed Nickel 19 839 ZB0 Oil Rubbed Bronze 19 839 BE0

Polished Nickel

Technical Information

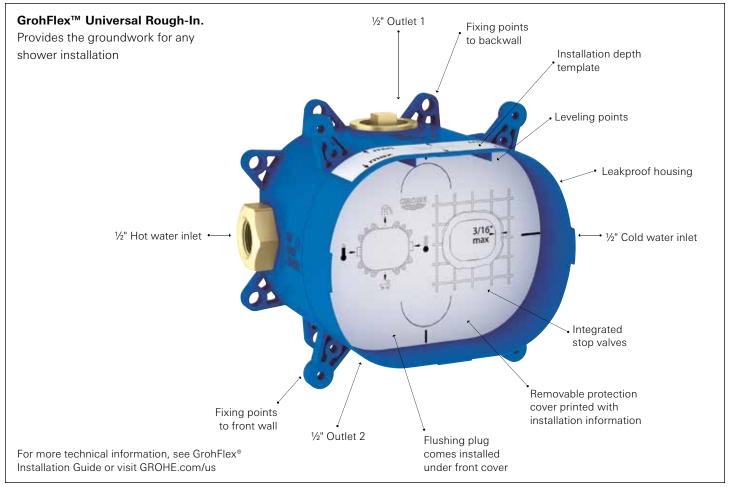

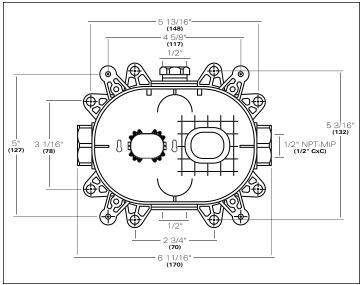

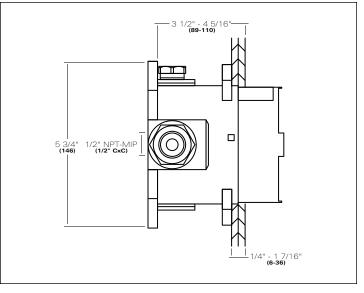

$\mathsf{GrohFlex}^\mathsf{TM}$ Bathroom Solution Kits

Single control handle design offers easy, intuitive operation. All functions are controlled from one axis.

For more technical information, see GrohFlex® Installation Guide, visit GROHE.com/us or Grohe.ca

Custom Shower Thermostatic [1] [2] [3]

- [1] Double scale marking: °F/°C
- [2] 100°F/38°C safety stop button and override button
- [3] Temperature handle





- [1] Temperature handle
- [2] Aquadimmer volume and diverter lever; turn left to operate shower, turn right to operate bath
- **Dual Function**

14 GPM at 45 psi (53 l/min)



- [1] Double scale marking: °F/°C
- [2] 100°F/38°C safety stop button and override button
- [3] Temperature handle
- [4] Aquadimmer volume and diverter lever; turn left to operate shower, turn right to operate bath

5.6 GPM at 45 psi (21.2 l/min)

6.6 GPM at 45 psi (25 l/min)

6.6 GPM at 45 psi (25 l/min)

Single Function Pressure Balance

[1] Temperature handle

Thermostatic [1] [2]

- 6.6 GPM at 45 psi (25 l/min)

Single Function

[3] Temperature handle

[4] Volume lever

[1] Double scale marking: °F/°C

[2] 100°F/38°C safety

stop button and override button

GROHE America, Inc. Tel. 1.630.582.7711 Fax. 1.630.582.7722 us-customerservice@grohe.com #0616GFB

Printed in the USA © 06/2016 GROHE America, Inc. continuous improvement and Roselle, IL

GROHE has a policy of therefore reserves the right to alter product specifications without prior notice.



DISCOVER THE WORLD OF GROHE AT WWW.GROHE.COM/US

